


# Aid™ Acoustics

## Ceiling Tile 20



Trademark and 2024 ©

The Aid™ Acoustics Ceiling Tile 20, engineered for efficient integration with ceiling grid systems, delivers effective sound absorption in varied environments. Constructed from high-density fibreglass wool, it ensures a uniform appearance. Available in two sizes, 595mm x 595mm and 595mm x 1195mm, the tile accommodates different spatial needs. With three edge options—square, tegular, and insert—it provides installation flexibility. Ceiling Tile 20 is designed for both commercial and residential use, focusing on acoustical efficiency and architectural coherence.

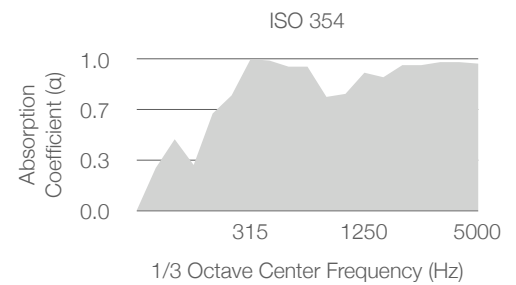

### Technical Specifications

Material	Fiberglass Wool, Fleece Surface
Standard Dimension	595mm x 595mm, 595mm x 1195mm
Standard Thickness	20mm
Density	100 kg/m <sup>3</sup>
Edge Type	Square, Tegular, Insert
Dots Finishing	600, 700, 800 Texture, White
Spray Finishing	White, Black, Grey, Pantone or RAL
Fire-Rated Test	EN 13501-1 = Class A s1, d0
Acoustic Test	ISO 354 = NRC 0.86