



# Fabrix™

## Edge Load

### Square Edge

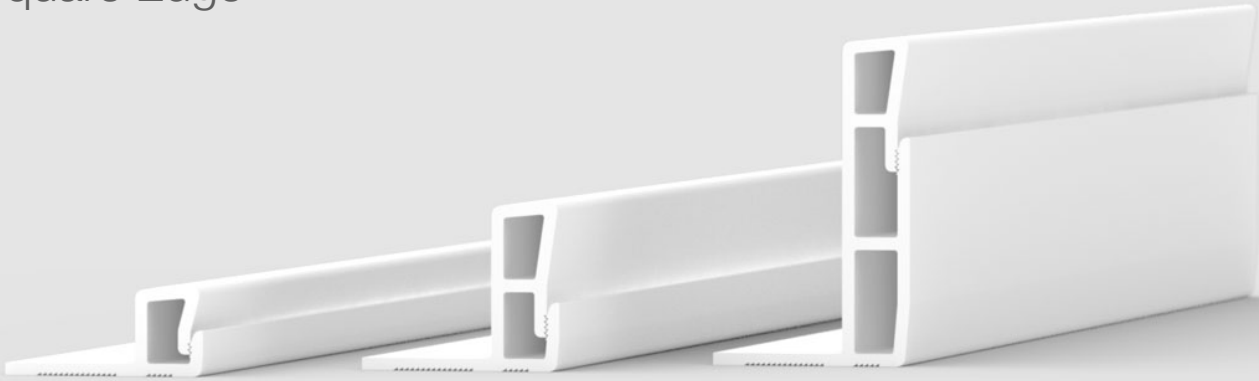

Trademark and 2024 ©

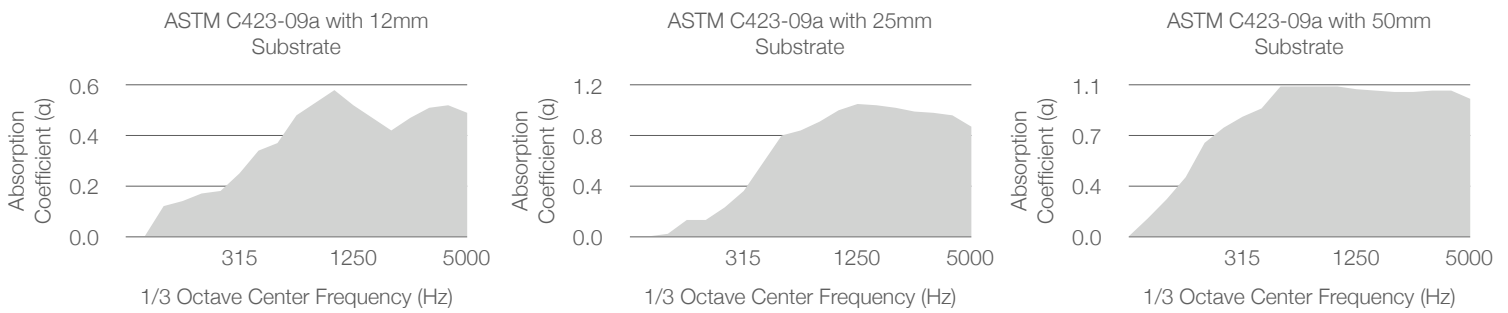

The Edge Load range terminates the fabrics at perimeters. The fabric sits tightly in between the teeth of the track. The teeth are serrated downwards to keep the fabric from slipping out. The track features an anti-warp feature to prevent an imprint on the fabric, and also an anti-slip feature to adhere better to surfaces.

### Technical Specifications

Material	Polymer
Standard Dimension	2000mmL
Standard Height	15mm, 27mm, 53mm
Standard Thickness	2mm
Toxicity Emission Test	BS 6853 Annex B = R < 1.0
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustic Test	ASTM C423-09a 12mm Acoustic Foam = NRC 0.52 25mm Fibreglass Wool = NRC 0.75 50mm Fiberglass Wool = NRC 1.00