



# Fabrix™

## Mid Load

### Square Edge

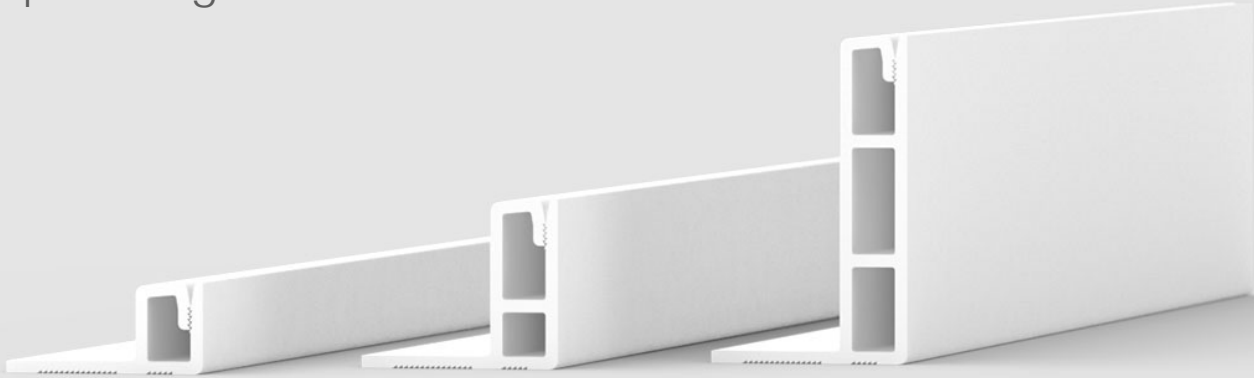

Trademark and 2024 ©

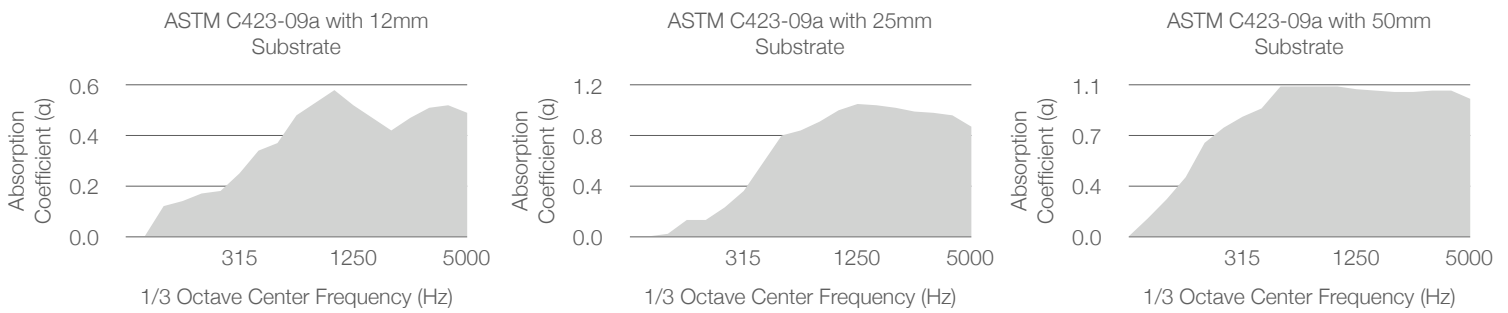

The Mid Load range joins the fabric to create a seam. The fabric sits tightly in between the teeth of the track. The teeth are serrated downwards to keep the fabric from slipping out. The track features an anti-warp feature to prevent an imprint on the fabric, and also an anti-slip feature to adhere better to surfaces.

### Technical Specifications

Material	Polymer
Standard Dimension	2000mmL
Standard Height	15mm, 27mm, 53mm
Standard Thickness	2mm
Toxicity Emission Test	BS 6853 Annex B = R < 1.0
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustic Test	ASTM C423-09a 12mm Acoustic Foam = NRC 0.52 25mm Fibreglass Wool = NRC 0.75 50mm Fiberglass Wool = NRC 1.00