

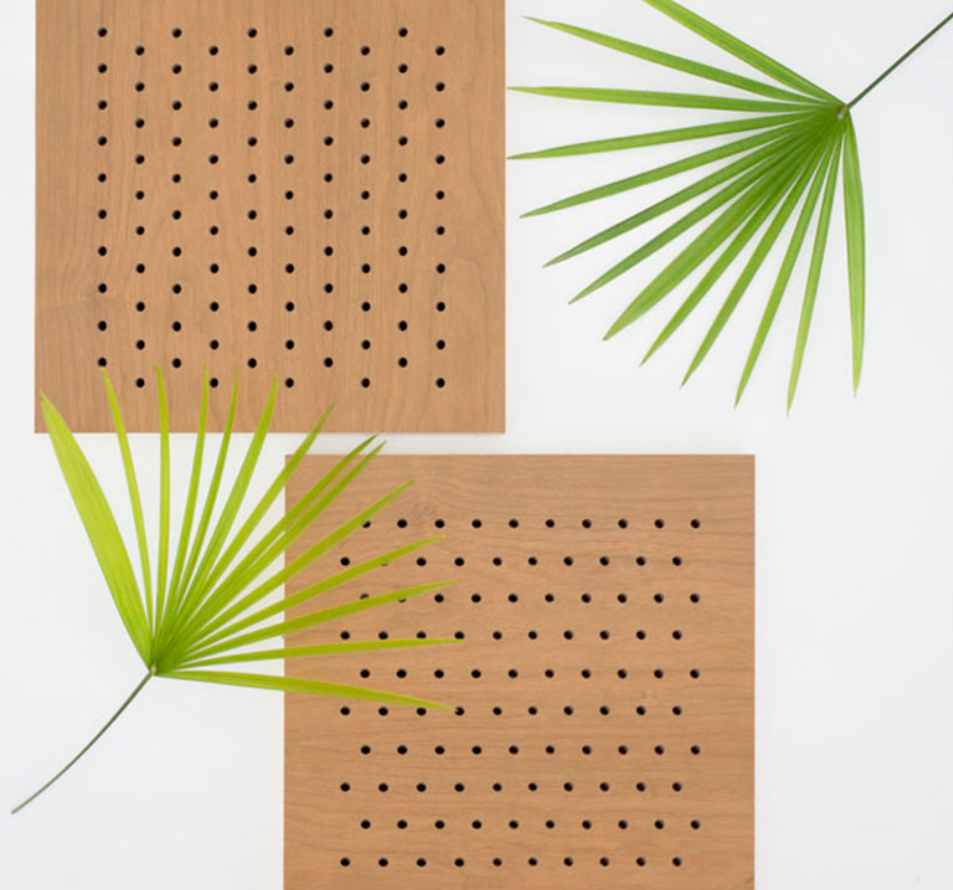


Timberix™ Perforated V 16/16/8



Trademark and 2025 ©

Timberix™ Wooden Perforated panel is made with a 2-layer perforation structure, which traps and diffracts sound in the holes. The sound that passes through the perforation is further absorbed by an acoustic substrate such as fibreglass or mineral wool, which reduces reverberation in the room.

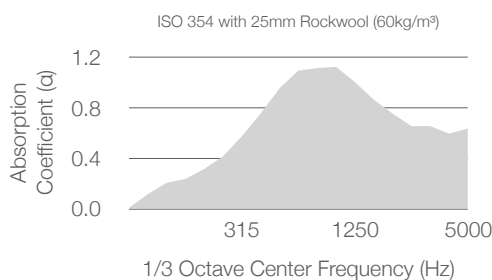

Technical Specifications

| | |
|-----------------------------|---|
| Structure | Basic Material, Finishing & Fleece |
| Material | E1 MDF, FR MDF, MgO Composite |
| Front Surface | Melamine, Veneer, Paint |
| Standard Dimension | 600mm x 600mm, 600mm x 1200mm, 1200mm x 2400mm |
| Standard Thickness | 15mm |
| Distances Between Two Holes | 16/16mm |
| Diameter Of Holes | 8mm |
| Standard Pattern | 16/16/8mm (V) |
| Open Area | 22.67% |
| Edge Banding | None, PVC, ABS |
| Eco-Friendly Test | EN 13986 = E1 |
| Fire-Rated Test | EN 13501-1 = Class B s1, d0 |
| Acoustic Test | ISO 354 = NRC 0.81 with 25mm Rockwool (60kg/m³) |