

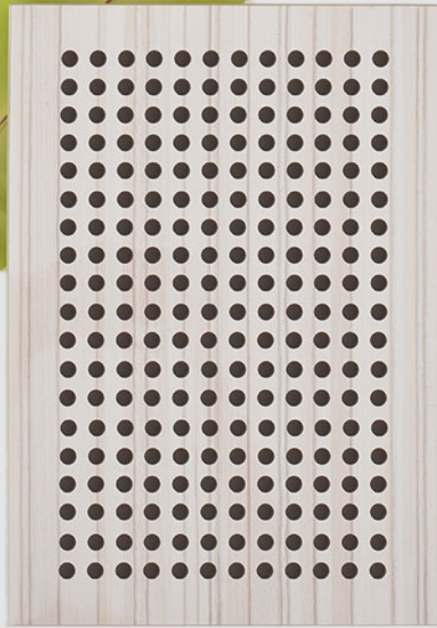


Timberix™ Perforated E 16/16/10



Trademark and 2025 ©

Timberix™ Wooden Perforated panel is made with a 2-layer perforation structure, which traps and diffracts sound in the holes. The sound that passes through the perforation is further absorbed by an acoustic substrate such as fibreglass or mineral wool, which reduces reverberation in the room.

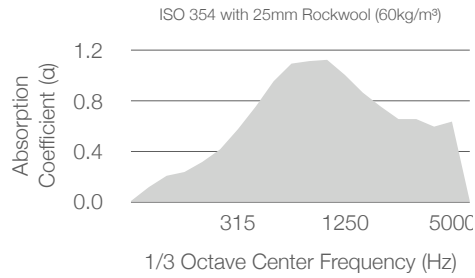

Technical Specifications

Structure	Basic Material, Finishing & Fleece
Material	E1 MDF, FR MDF, MgO Composite
Front Surface	Melamine, Veneer, Paint
Standard Dimension	600mm x 600mm, 600mm x 1200mm, 1200mm x 2400mm
Standard Thickness	15mm
Distances Between Two Holes	16/16mm
Diameter Of Holes	10mm
Standard Pattern	E 16/16/10mm
Open Area	30.66%
Edge Banding	None, PVC, ABS
Eco-Friendly Test	EN 13986 = E1
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustic Test	ISO 354 = NRC 0.81 with 25mm Rockwool (60kg/m³)